

féline

Collection book 1

FRESCO Collection

Fresco collection is the line of natural wool felts of Féline. Our wool is mulesing free. The unique properties of wool in combination with the trendy colour range make this fabric highly suitable for design applications.



Composition

90% WO/10 % PL

Available thickness	2mm	3mm	4.5mm
Width (cm)	150	150	150
Weight (gr/lm)	420	820	1200
MOQ (lm)	1	1	1

*All thicknesses available from stock in 21 colours.

Recyclability

All Féline felts are produced with respect to nature. No use of water or drying machines in the felting process.

Wool is a natural, biodegradable and renewable material.

Quality

Wool is durable, naturally fire resistant, moisture repellent, thermal and sound insulating.

Processing Féline fabrics

Féline advises to use experienced installers with knowledge on how to process and handle the fabric. Please note that processing or applying the fabric means that you have accepted the order. Féline will not be able to take any returns or give refunds for fabrics after they have been processed / applied.

Please always pay attention to the face side of the fabric. The face side of our fabrics is always the inner side of the roll.

In case you have any doubts before applying your fabric, than feel free to contact us.

Eco Glue Forte

Our water-based and biodegradable glue, suited for the application of our felt and acoustic wall covering.

Treatments

With our in-house production facilities we can support you in a wide range of applications for your fabrics. Our fabrics are available with a wide variety of backings. Please ask and see what Féline can do for you.

Acoustic Wallcovering

All our felts are available with a non-woven backing, for a perfect application on walls and ceilings.

Width: 140 cm

Available in all colours and thicknesses.
This backing gives the right support to process our felt on walls and ceilings.
We recommend to apply the wall covering using our Eco Glue Forte.

Applications

Walls, ceilings, panels, upholstery and lighting.

Maintenance



Mechanical test

Test	Value	Conform
Martindale	80.000 turns	UNI EN ISO 12947-2
Pilling	4	UNI EN ISO 12945-2
Colourfastness to light	4 5	UNI EN ISO 105 B02
Colourfastness to rubbing	4 5	UNI EN ISO 105 X12
Tear Strenght warp and weft	Pass	UNI EN ISO 13937
Shrinkage to dry cleaning warp and weft	+ / - 1%	

Fire retardancy

Test	Value	Conform
Cigarette test	pass	EN 2021-1
Match test	pass	EN 1021-2
Classe 1 IM	pass	UNI 9175 / 1987
EN 13501-1	C-s1-d0	NF EN ISO 11925-2 A :2013 NF EN 13823 + A1 : 2015

* Indicative test values. Testing requirements always depend on the fabric application.

** Additional FR treatment is possible.

Acoustic values


Test	Value	Conform
Flat lay one-sided absorption <i>*Hung on French Cleat (two-sided absorption will improve acoustic values)</i>	Between 0,15 - 0,20	NEN - EN - ISO 11654
Combined with 70mm framework	0,95	NEN - EN - ISO 11654

* Testing value is subject to the end-application. Please ask for additional information.

Fresco colour range

Please note this is a natural product. Slight colour variations are considered normal.


Fresco White 001

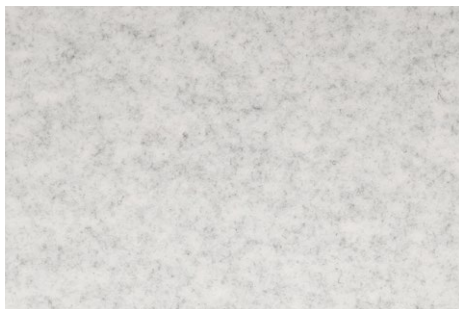


Fresco Beige 001




Fresco Grey 001

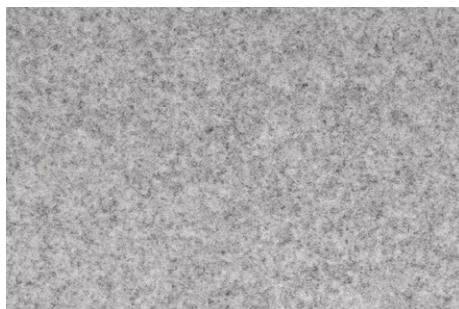


Fresco Brown 001

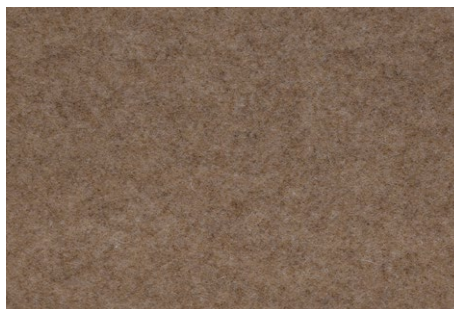


Fresco Grey 002

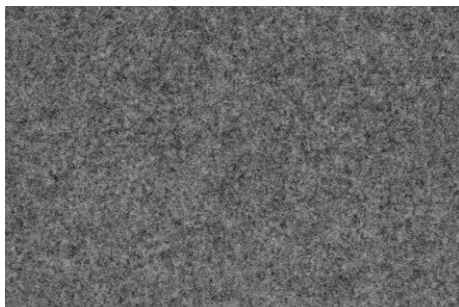

Fresco Grey 004

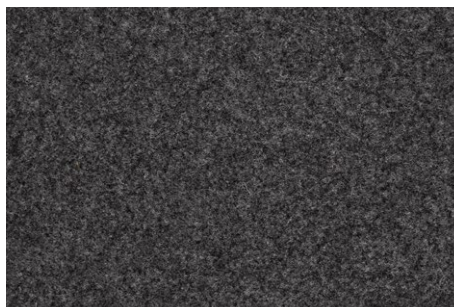


Fresco Blue 001

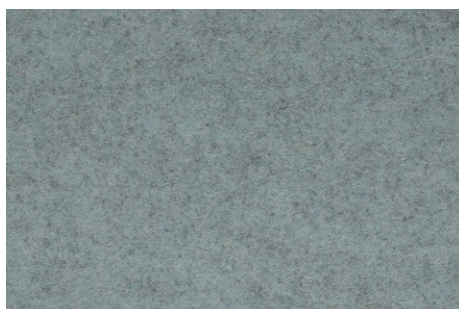


Fresco Green 002




Fresco Green 006

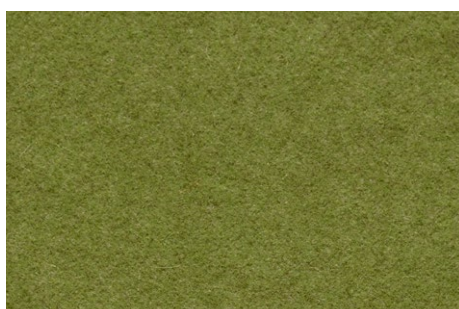

Fresco Green 004

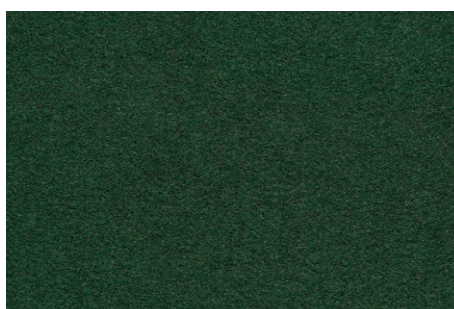

Fresco Brown 004

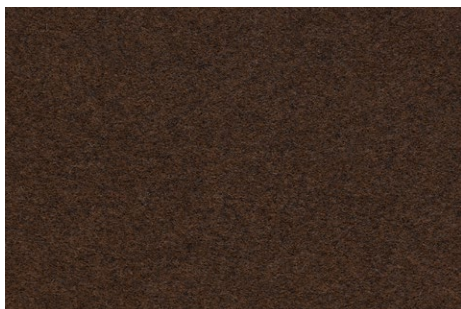

Fresco Yellow 002




Fresco Pink 006




Fresco Pink 005




Fresco Purple 006

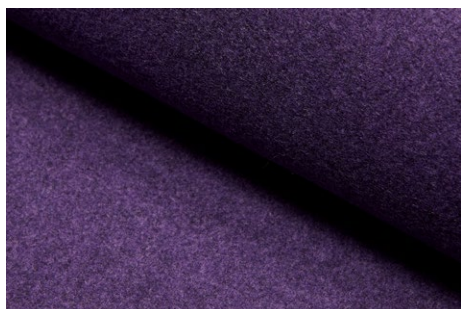


Fresco Red 001

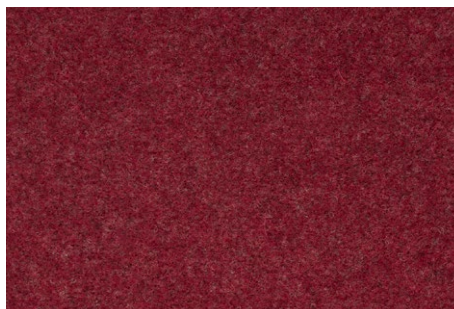


Fresco Blue 007

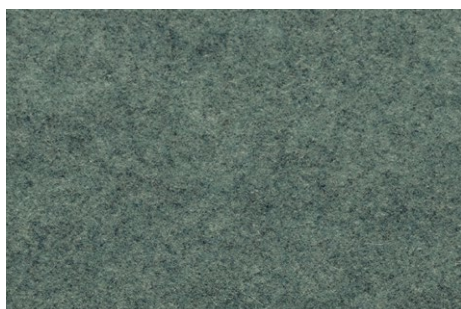


Fresco Blue 012

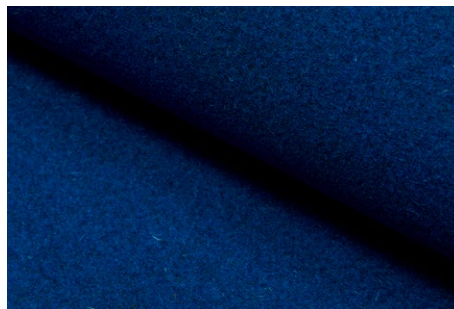

Fresco Blue 003

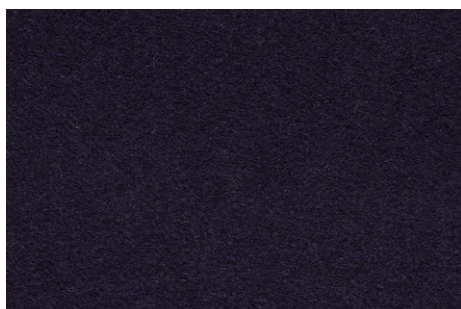

Fresco Black 001

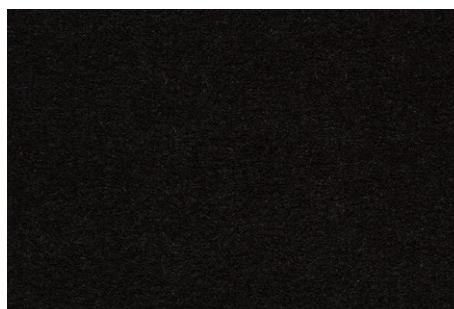

Fresco Yellow 003



MINIMAL ART Collection

Minimal art collection is the line of felts that emphasizes the commitment of Féline to combine interior fabrics with environmental protection. The raw material of this line derives from the recycling of plastic bottles.



Composition	100% recycled PET	
Available thickness	2mm	4mm
Width (cm)	150	150
Weight (gr/lm)	600	1200
MOQ (lm)	1	1

* All thicknesses available from stock in 10 colours.

Recyclability

All Féline felts are produced with respect to nature. No use of water or drying machines in the felting process.

This material is made from recycled plastic bottles.

Quality

PET is sustainable, easy to process and sound-absorbing.

Processing Féline fabrics

Féline advises to use experienced installers with knowledge on how to process and handle the fabric. Please note that processing or applying the fabric means that you have accepted the order. Féline will not be able to take any returns or give refunds for fabrics after they have been processed / applied.

Please always pay attention to the face side of the fabric. The face side of our fabrics is always the inner side of the roll.

In case you have any doubts before applying your fabric, than feel free to contact us.

Eco Glue Forte

Our water-based and biodegradable glue, suited for the application of our felt and acoustic wall covering.

Treatments

With our in-house production facilities we can support you in a wide range of applications for your fabrics. Our fabrics are available with a wide variety of backings. Please ask and see what Féline can do for you.

Acoustic Wallcovering

All our felts are available with a non-woven backing, for a perfect application on walls and ceilings.

Width: 140 cm


Available in all colours and thicknesses.

This backing gives the right support to process our felt on walls and ceilings. We recommend to apply the wall covering using our Eco Glue Forte.

Applications

Walls, ceilings, panels, upholstery and lighting.

Maintenance



Mechanical test

Test	Value	Conform
Martindale	100.000 turns	ISO 12947-2
Colourfastness to light	6	ISO 105 B02
Colourfastness to rubbing dry and wet	4 5	ISO 105 X12
Tear Strenght warp and weft	Pass	EN 29073-3
Shrinkage to dry cleaning warp and weft	+/- 1% 0%	production non-production direction

Fire retardancy | FR treatment possible.

Acoustic values


Test	Value	Conform
Flat lay one-sided absorption <i>*Hung on French Cleat (two-sided absorption will improve acoustic values)</i>	Between 0,15 - 0,20	NEN - EN - ISO 11654
Combined with 70mm framework	1,00	NEN - EN - ISO 11654

* Testing value is subject to the end-application. Please ask for additional information.


Minimal art colour range

The raw material of this product derives from the recycling of plastic bottles. Slight colour variations are considered normal.

Minimal art White 001

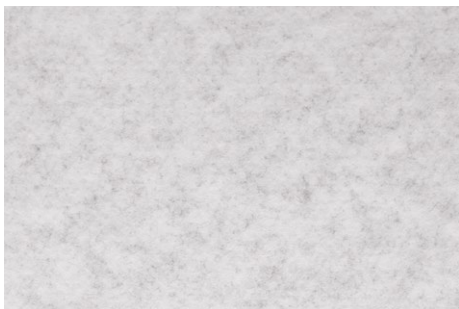


Minimal art Beige 001

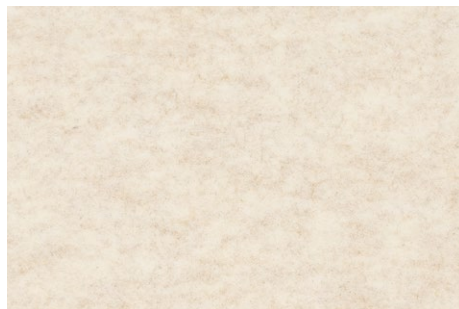


Minimal art Multi 001



Minimal art Green 001

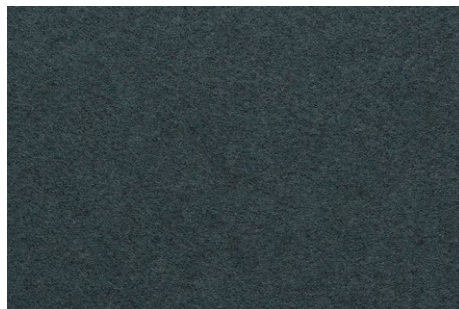

Minimal art Brown 002

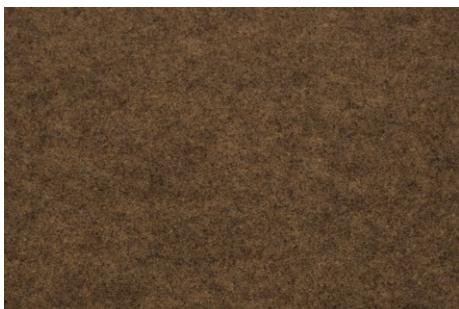

Minimal art Purple 002



Minimal art Blue 002




Minimal art Grey 001



Minimal art Blue 003



Minimal art Black 001

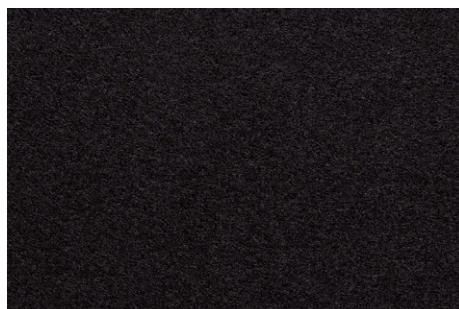

Projects & Applications



Recycled walltextile Minimal Art
Project by: L&N Partners



Walltextile MA Green 001



Acoustic wallpanels
Design by: StudioVIX



Fresco Yellow 001



Acoustic interior design
Project by: We are OOO



Walltextile MA Grey 001



Walltextile
 Fresco Yellow 002





Sustainable store design
Project by: Ace & Tate



Acoustic lampshade design
Project by: Spinlight

Jarmuiden 7
1046 AC, Amsterdam
The Netherlands
+31 (0)20 611 60 25
info@felinefabrics.com
www.felinefabrics.com

